

by lamparke —
walk on **art**

terra

**refined by nature.
defined by design.**

organic texture | refined finish | subtle hues | enduring quality

36h

SPILL PROTECT
hydrophobic coating





with usage class 32, abrasion class 4,
and a 20-year residential warranty*,
this is beauty that endures—
even when life never slows.

6006 | aspen



6005 | albany



fast installation

fast installation, no wait with our advanced click system, installation is effortless—just lock the planks in place and you're ready to use. enjoy immediate results with a seamless finish.



comfort in every step

gentle underfoot and kind to your joints, this floor feels as good as it looks.



all year comfort

our wooden floors know how to adapt. they feel warm beneath your feet when winter settles in, and stay naturally cool when summer sunlight pours in.



easy renovation

advantageous for renovations, easy installation under door frames, less difference in level to adjacent floors.




healthy living

free from pvc's, metals, plasticizers, ensures high indoor room air quality



36h
SPILL PROTECT

hydrophobic coating technology is applied to the joints, enhancing the locking system's water resistance and preventing moisture intrusion.

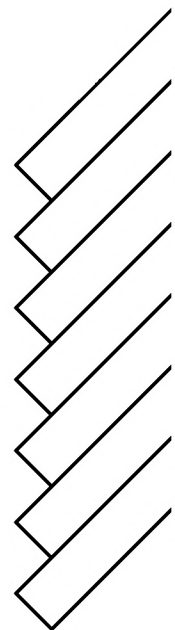

terra

6007 | jasper

36h
SPILL PROTECT



for intensive use
class 32 - AC4

square edge



wood grain



all year
comfort



20 years*

1220 x 200 x 8mm



1 box :
10 pcs., 26.26 ft²

discover the collection.

a palette for every moment.

choose from a carefully crafted selection of
shades, each one ready to shape your space.

your floor becomes a quiet expression;
not just design, but something deeply your own.



terra | 6001 cardoba

standard plank box
8 x 200 x 1220 mm 10 pcs | 26.26 ft²



terra | 6002 evoke

standard plank box
8 x 200 x 1220 mm 10 pcs | 26.26 ft²



terra | 6003 kansas

standard plank box
8 x 200 x 1220 mm 10 pcs | 26.26 ft²



terra | 6004 fresco

standard plank box
8 x 200 x 1220 mm 10 pcs | 26.26 ft²



terra | 6005 albany

standard plank box
8 x 200 x 1220 mm 10 pcs | 26.26 ft²



terra | 6006 aspen

standard plank box
8 x 200 x 1220 mm 10 pcs | 26.26 ft²



terra | 6007 jasper

standard plank	box
8 x 200 x 1220 mm	10 pcs 26.26 ft ²



terra | 6008 fargo

standard plank	box
8 x 200 x 1220 mm	10 pcs 26.26 ft ²





6001 cardoba



6002 evoke



6003 kansas




6004 fresco




6005 albany



6006 aspen

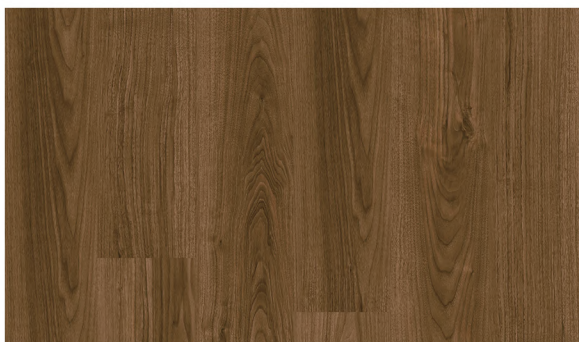

6007 jasper

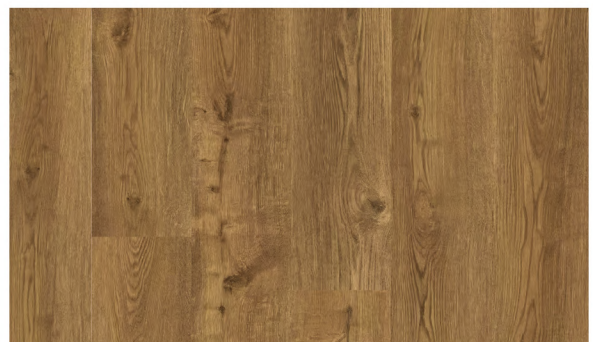

6008 fargo

version 01/2025

	contains	m ²	ft ²
1 pack terra	10 planks	2.44 m ²	26.26 ft ²

product specifications

dimensions	1220 x 200 mm
total thickness	08 mm
bevels	n/a
click system	unilin/valinge
level of use according to European standard EN10874	23 heavy domestic use
	32 general commercial use
Residential warranty	20 years*
Commercial warranty	3-5 years*


*conditions apply

composition


surface layer	direct laminated paper, impregnated with melamine resin.
substrate	high density fiberboard (HDF).
backing	direct laminated paper, impregnated with melamine resin.

test results

abrasion resistance	EN13329	AC4 (IP≥4000)
impact resistance	EN13329 ISO	small ball : ≥ 35 mm - big ball : ≥ 750 mm
thickness swelling	24336 EN13501-1	≤ 18%
fire resistance	EN7 17-1	Cfl-S1
formaldehyde emission	EN13893 EN323	E1
slip resistance	EN438	DS
density	EN16581 EN425	>850 kg/m ³
resistance to staining	ISO 8302	5 (groups 1+2) ; 4 (group 3)
effect of a furniture leg		no damage (foot type 0)
effect of a castor chair		no damage with type W wheels
thermal resistance		0,08 m ² K/W – suitable for floor heating/cooling.



what is a laminate floor made of?

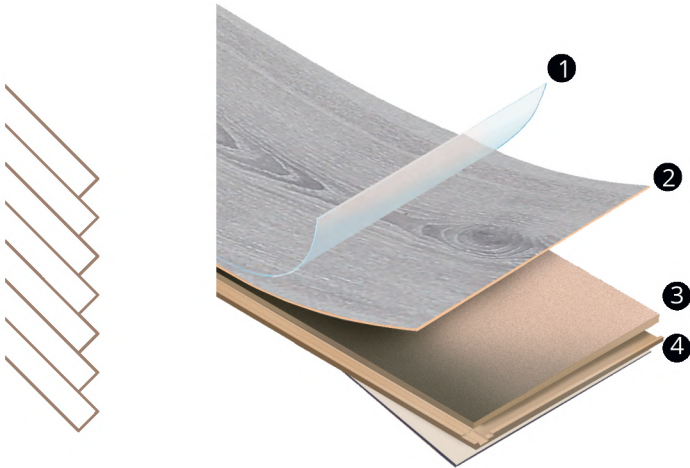


- ① an overlay that determines the strength and resistance of your floor
- ② a decor paper for the design
- ③ a high-density fibreboard (HDF) core
- ④ a counterbalance to stabilise and protect the HDF core

1. protect

by lamparke floor is an easy-care, wear-resistant floor with a long lifespan and a hygienic hard surface. to protect your floor, we recommend the following actions :

- place a suitable doormat at your entrance(s) to absorb dirt and/or moisture.
- sand and dirt can have the effect of “sandpaper” and may cause premature wear and tear or scratches.
- place felt pads under the legs of chairs and tables to avoid scratches.
- equip other furniture and heavy objects with felt pads for safe moving.
- clear plastic mats must be used under office chairs with wheels.

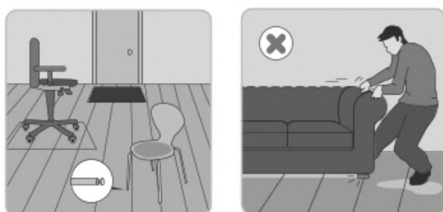

indoor temperature and relative air humidity

by lamparke floor is produced from wood material that reacts on changes in the indoor climate. the ideal indoor climate for a laminate floor is a relative humidity between 40 and 60 % and a temperature between 18 and 25 °C.

static electricity

by lamparke floor is a partially insulating floor covering. if the relative humidity in the room is kept at around RH 50 % or more, then this will reduce the floor's ability to develop static charges.


2. clean



by lamparke floors are extremely easy to clean. in very little time and with a minimum of effort you can enjoy a clean and beautiful floor for many years.

dry cleaning methods

for daily cleaning, we recommend that you use a soft brush, vacuum cleaner or dry dust mop. microfiber mops are ideal.



wet cleaning methods

when cleaning with water, a well wrung-out cloth and lukewarm water are recommended. avoid using too much water.

don'ts:

- never use steam cleaners on a by lamparke floor • never use highly concentrated soap solutions on the floor • do not use organic detergents, they will leave a thin film of grease on the surface, resulting in visible footprints. only synthetic detergents are recommended. • do not wax, varnish or polish the floor



lamparke —
walk on **art**

